

AVAILABLE WIDTHS

12" - 21"*


STANDARD PANEL WIDTHS:

13", 17" or 21"

*Drexel Metals design pressures, wind uplifts and test reports are for specific deck attachments, material gauges, clip spacing and panel widths. A complete specification and listing is available online at www.drexelmetals.com


**IDEAL APPLICATION
COMMERCIAL & RESIDENTIAL**

Quality materials and more than 100 years of successful design application govern the construction of our DMC 100SS 1" mechanically seamed metal roof system. Ideal for light commercial or residential applications, this smartly detailed profile can be curved for enhanced architectural appeal. Installed as full-length panels with no end laps helps provide the ultimate in all-weather and watertight protection curved installations.




SUBSTRATES AVAILABLE

- Galvalume® - 24ga and 26ga
- Drexlume® - 24ga and 26ga
- Aluminum - .032"
- Copper - 16 oz and lead-coated copper
- Zinc






DMC 100SS PROFILE

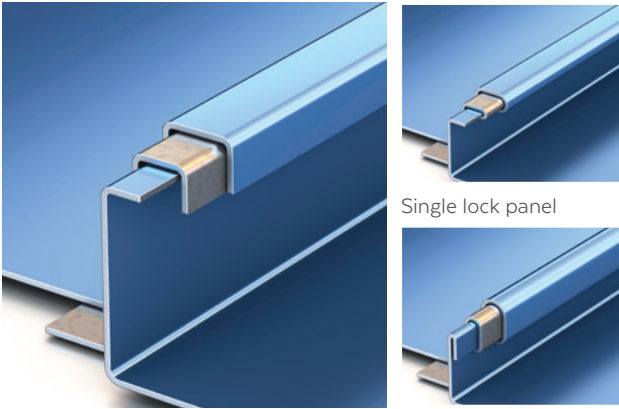

Unseamed panel

Double lock panel

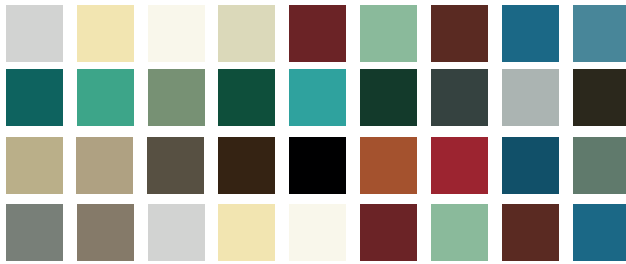

PROFILE OPTIONS

- Single lock panel
- Double lock panel
- Radius panel (single or double lock)

FINISHES AND PRODUCT WARRANTY

Available in a variety of coatings and colors by Valspar. See the Drexel Metals color card for standard colors and paint specifications.

GALVALUME SUBSTRATE - 35 YEAR WARRANTY

35 year non Pro-rated PVDF Paint Warranty

High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

ALUMINUM SUBSTRATE - 35 YEAR WARRANTY

35 year non Pro-rated PVDF Paint Warranty

High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

DREXLUME SUBSTRATE - 25 YEAR WARRANTY

Mill finished Galvalume® with a two-sided, clear acrylic finish.

PRODUCTION OPTIONS

Factory made or field rolled to exact lengths
Optional: striation, beads, pencil ribs

INSTALLATION

Can be installed over plywood decking and Drexel Metals MetShield® underlayment.

SLOPE

Minimum slope 2:12

MINIMUM ROOF PITCH

2:12 - low roof pitch

TESTING

- UL 580 Wind Uplift (Class 90)
- UL 2218 Class 4 Hail Impact
- UL 790 Class A Fire Rating
- UL Environmental - SRI Third Party Verified



CORPORATE HEADQUARTERS: 1234 GARDINER LANE, LOUISVILLE, KY 40213 | 888-321-9630 TOLL-FREE | 502-690-6174 FAX | DREXELMETALS.COM

©2020 Drexel Metals, Inc. All rights reserved. Galvalume® is a registered trademark of BEIC International, Inc. Sherwin-Williams® Coil Coatings is trademark of The Sherwin-Williams Company. Drexlume™ is a trademark of Drexel Metals, Inc. ENERGY STAR name and logo are registered U.S. marks and are owned by the U.S. government. Colors shown represent the actual color as closely as possible. To ensure exact color for final approval, a metal color chip is available. Warranty statements mentioned are outlines; complete Limited Warranty information is available on request. No other warranty expressed or implied is applicable. Please call or visit drexelmetals.com or residentialmetalroof.com for more details.